

## **Composting of aged reed bed biosolids for beneficial reuse: a case study in New Jersey, USA**

Rutgers University has made this article freely available. Please share how this access benefits you.  
Your story matters. [\[https://rucore.libraries.rutgers.edu/rutgers-lib/49998/story/\]](https://rucore.libraries.rutgers.edu/rutgers-lib/49998/story/)

This work is an **ACCEPTED MANUSCRIPT (AM)**

This is the author's manuscript for a work that has been accepted for publication. Changes resulting from the publishing process, such as copyediting, final layout, and pagination, may not be reflected in this document. The publisher takes permanent responsibility for the work. Content and layout follow publisher's submission requirements.

Citation for this version and the definitive version are shown below.

**Citation to Publisher** Kannepalli, Sarat, Ravit, Beth & Strom, Peter F. (2016). Composting of aged reed bed biosolids for beneficial reuse: a case study in New Jersey, USA. *Compost Science & Utilization* 24(4), 281-290. <http://dx.doi.org/10.1080/1065657X.2016.1171739>.

**Citation to this Version:** Kannepalli, Sarat, Ravit, Beth & Strom, Peter F. (2016). Composting of aged reed bed biosolids for beneficial reuse: a case study in New Jersey, USA. *Compost Science & Utilization* 24(4), 281-290. Retrieved from [doi:10.7282/T3M32XXR](https://doi.org/10.7282/T3M32XXR).

**Terms of Use:** Copyright for scholarly resources published in RUcore is retained by the copyright holder. By virtue of its appearance in this open access medium, you are free to use this resource, with proper attribution, in educational and other non-commercial settings. Other uses, such as reproduction or republication, may require the permission of the copyright holder.

*Article begins on next page*

## **Composting of aged reed bed biosolids for beneficial reuse: a case study in New Jersey, USA.**

Sarat Kannepalli<sup>1\*</sup>, Beth Ravit<sup>2,3</sup>, Peter F. Strom<sup>3</sup>

<sup>1</sup> 882 San Aleso Avenue, Apt # 3, Sunnyvale, CA 94085, USA

<sup>2</sup> Center for Urban Environmental Sustainability (CUES), Rutgers University, 93 Lipman Drive, New Brunswick, NJ 08901, USA; E-Mail: [ravit@envsci.rutgers.edu](mailto:ravit@envsci.rutgers.edu)

<sup>3</sup> Department of Environmental Sciences, Rutgers University, 14 College Farm Road, New Brunswick, NJ 08901, USA; E-Mail: [strom@envsci.rutgers.edu](mailto:strom@envsci.rutgers.edu)

\*Corresponding author; E-Mail: [sarat1030@gmail.com](mailto:sarat1030@gmail.com); Tel.: 1-732-322-2690

A shorter version of title (<50 character spaces) (running head): “Composting of aged reed bed biosolids.”

## Abstract

Reed beds with *Phragmites australis* (common reed) have been utilized to decrease the water, nutrient and volatile solids content of sewage sludge. An efficient disposal/reuse option was sought for reed bed biosolids accumulated over a 15 year period at a wastewater treatment facility in New Jersey, USA. The study facility had 14 reed beds, each with 1000 wet tons capacity, which were full, and so the solids needed to be removed. Because *P. australis* is considered an invasive species in New Jersey and several other states in the United States, disposal or reuse of solids containing this plant is regulated. Composting was examined as a potential treatment for destroying the plant's reproductive rhizomes. The high temperatures achieved during composting were also tested to determine if regulatory criteria for pathogen reduction could be met, making the composted product suitable for unrestricted land application. Preliminary studies indicated the sludge had stabilized to the point where self-heating did not occur. Among the carbon amendments tested in the laboratory to stimulate composting activity, *Phragmites* above ground biomass was determined to be most suitable. In a field test, *Phragmites* above ground biomass was mixed with reed bed biosolids at a 1:2 (w/w) ratio. The temperatures achieved resulted in complete mortality of *Phragmites* rhizomes. In laboratory tests, rhizomes placed in a drying oven at 50°C for 24 hours, or 55°C for 12 hours, showed 100% plant mortality. However, under field conditions pile temperatures could not be maintained long enough for the sludge to meet the USEPA 503 biosolids time-temperature pathogen rule requirements for unrestricted land application, even though sample fecal coliform counts did meet regulatory limits.

Keywords: reed beds, biosolids, *Phragmites australis*, composting, land application of sludge, USEPA 503 rule

## 1) Introduction

Reed beds are a type of constructed wetland used to dewater and remove nutrients from wastewater sludge (Toet et al., 2005, Kuusemets et al., 2005). Because of efficient dewatering and mineralization achieved at an inexpensive cost compared to conventional dewatering technologies, reed beds are in use worldwide. Nielsen (2008) reported that there are over 140 full-scale reed bed systems operating in Denmark alone. Others have reported operational reed bed systems in the United Kingdom (Edwards et al., 2001), France (Troesch et al., 2008), China (Yubo et al., 2008), Italy (Giraldi et al., 2009), and the USA (Kim and Smith, 1997, Burgoon et al., 1997, Begg et al., 2001). Typically, reed beds increase the total solids content to 20-30% from an initial concentration of 1-4%, and can achieve a volatile solids reduction of 25-30% (Uggetti et al., 2010). Begg et al. (2001) reported that reed beds have over 90% removal efficiency for sludge dewatering, total suspended solids and biochemical oxygen demand, and that nitrates and total phosphorus removal rates were 90% and 80% of the initial concentrations, respectively.

Vegetation commonly used in these treatment systems are emergent aquatic species, such as cattail (*Typha latifolia*), rush (*Scirpus ancistrochaetus*), and common reed (*Phragmites australis*) (Gersberg et al., 1985). Characteristics of common reed, such as fast growth; tolerance to different water levels, drought, and variability of pH and salinity; and deep growing rhizome and root systems enable this plant to adapt to many environments (De Maeseneer, 1997). However, these qualities also contribute to the plant's potential to become an invasive species if accidentally released in a habitat where they are non-native.

A 9 million gallons/day (MGD) (0.4 m<sup>3</sup>/s) capacity wastewater treatment plant located in New Jersey (NJ) has utilized 14 *Phragmites australis* reed beds (1000 t wet sludge/bed) for over

15 years to de-water anaerobically digested sewage sludge. These beds were filled to capacity and the accumulated biosolids needed to be removed so the beds could be reused. Since *P. australis* is identified as an invasive weed species by the United States Department of Agriculture (USDA, 2015), the presence of live *Phragmites* rhizomes (reproductive organ) restricted economical disposal and recycling options. Since an objective of reed bed sludge treatment is to obtain a final product suitable for land application, methods of *Phragmites* removal that would be cost-effective and environmentally sustainable were explored.

Land application of sewage sludge in the United States is regulated by the U.S. Environmental Protection Agency (USEPA) under Title 40, Code of Federal Regulations, Part 503 (USEPA, 1994a). For land application, Part 503 classifies sewage sludge as either exceptional quality (EQ) or non exceptional quality (non-EQ) based on USEPA standards for metals (As, Cd, Cr, Cu, Pb, Hg, Mo, Ni, Se, Zn), pathogen requirements (bacteria, viruses, parasites) and attractiveness to disease vectors (rodents, flies, mosquitoes) (USEPA, 1994a). Sewage sludge that meets the most stringent requirements for the three criteria is classified as EQ and can be surface disposed of or land applied without restrictions. Sewage sludge that does not meet one or more of the parameters is non-EQ, and restrictions are placed on surface disposal or land application, increasing disposal costs.

In addition, based on pathogen reduction, Part 503 classifies biosolids into Class A or Class B. Biosolids meeting requirements for processes to further reduce pathogens (PFRP) are considered Class A, and have no use restrictions. Under the 503 rule, windrow composting is considered a PFRP if the composting pile temperature can be maintained at 55°C (131°F) or higher for 15 consecutive days, during which period the pile must be turned five times.

Demonstrated pathogen kill can also be used to show achievement of Class A status (e.g., Tata et al., 2000), but was not attempted in this study.

Composting is a microbial self-heating process in which heat generated through microbial metabolism of organic material accumulates, increasing its temperature (Finstein et al., 1987). Composting is known to destroy pathogens found in sewage sludge (Burge et al., 1981; Pourcher et al., 2005), as well as to inactivate weed seeds (Dahlquist et al., 2007).

The primary objective of this study was to determine if composting the reed bed biosolids would result in 100% mortality of *Phragmites* rhizomes. Additionally, we wanted to see if composting could also result in meeting the USEPA Class A designation for pathogen reduction, further enhancing the final reuse options of the material.

## **2) Materials and Methods**

### *2.1. Preliminary field study*

A composting test pile 7 x 6 x 6 ft (2.1 x 1.8 x 1.8 m) (l x w x h) of reed bed biosolids was constructed to see if it would self-heat. Temperature readings were taken at several heights (above ground) and at various insertion depths on days 4, 8, 13, 21, and 53. Because no temperature increases were observed, bench top laboratory experiments were conducted to determine if carbon amendment would induce self-heating.

### *2.2. Laboratory carbon amendment screening experiments*

Reed bed biosolids were mixed with various organic amendments and placed in well-insulated 1 gallon (3.8 L) containers (plastic thermoses with 5-8 cm additional foam insulation added externally on sides, bottom, and top) to encourage self-heating. (Note: although this method is not recommended for most quantitative composting lab testing, it can be suitable for demonstrating self-heating as a screening method, e.g., Finstein, 1972.) In selecting an

amendment, the main criteria considered were availability, ease of use, and minimizing an increase in the amount of final material requiring disposal or reuse, which all relate to cost effectiveness. A variety of materials were tested since the conditions at specific sites might favor different materials. Moisture content was adjusted to 60% and pH to 7 by addition of a granulated limestone slurry. Aeration was provided by small air pumps (Aquatic Gardens 8000, Petco) designed for 20-40 L aquariums. Temperature was monitored using a mercury glass stem thermometer.

### 2.3. Field trials

For Field Trial 1, a composting pile approximately 6 x 6 x 3 ft (1.8 x 1.2 x 0.9 m) (l x w x h) was constructed, composed of a 1:1 (w/w) shredded green *Phragmites* above-ground biomass (GPAGB):reed bed biosolids mixture. Initial pile temperature and ambient air temperature were measured. Moisture contents of the mixture (55.4%) as well as of the biosolids (53.8%) and the GPAGB (58%) were separately determined. Temperature measurements at 16 different points within the pile were taken on days 3, 6 and 12.

Based on the results of Field Trial 1, a larger pile (Field Trial 2) approximately 12 x 12 x 6 ft (3.6 x 3.6 x 1.8 m) (l x w x h), was constructed, composed of a 1:2 (w/w) GPAGB:reed bed biosolids mixture. This pile was turned on days 9 and 16 using a front-end loader. Temperature and oxygen content at the mid-length point of the pile were measured 9 times from day 0 to day 18 at heights of 1, 3, and 5 ft (0.3, 0.9, and 1.5 m) above ground, and at up to 7 different insertion depths at each height. Some additional temperature measurements were made 1 ft (0.3 m) farther along the pile to check uniformity. Moisture content of the initial pile mixture was 57%.

Samples for fecal coliform determination were obtained on six different occasions. Composite samples collected from the surface of the reed bed whose contents were used in

setting up the pile were analyzed for fecal coliforms before the beginning of the field trial. Subsequently, samples from the field test pile were collected and analyzed for fecal coliforms on day 0 when the pile was being set up, from the pile interior on the day of the first turning (day 9), from the pile interior on the day of the second turning (day 16) and from the pile interior one week later (day 23). The samples were composited by collecting 15 samples from 1, 3, and 5 ft heights (5 from each) of the pile. The sample collection and preparation were carried out according to the USEPA 503 rule for solids sample preparation for fecal coliform analysis (USEPA, 2013).

Three *Phragmites* rhizomes, each containing new buds and three intact nodes (Ravit et al., 2007), were collected on site and placed in a mesh bag; 5 replicate bags were placed at 1, 3, and 5 ft (0.3, 0.9, and 1.5 m) heights during pile construction. Three of the bags from each height were removed and replaced with new bags on the day 9 pile turn. The 6 remaining bags plus 9 replacement bags were retrieved on day 23, a week after the second pile turn. Recovered rhizomes were transferred to a Rutgers experimental greenhouse, where they were planted in Scott's Miracle-Gro Potting Mix (Model# 75664300, Marysville, OH, USA). Ambient temperatures were maintained at 16-18°C, and light levels at 90  $\mu$ Einsteins for 16 hr/day.

#### *2.4 Rhizome heat kill experiments*

To confirm the temperature and time period required to achieve complete mortality of *Phragmites* rhizomes, tests were conducted in a temperature controlled drying oven. Viable rhizomes were provided by Mr. Scott Davis of Constructed Wetlands Group, Inc. (New York, USA). Rhizomes with at least three growing buds were buried 1 inch (2-3 cm) deep in biosolids collected from the field site and heated in the oven at four temperatures (40, 45, 50 and 55° C) over two time periods (12 and 24 hr) (n = 40; 5 rhizomes for each time at each temperature).

Controls were also buried in field biosolids (5 for each temperature tested), but controls were left at room temperature. After the heat treatment, rhizomes were planted in Scott's Miracle-Gro Potting Mix and placed in the greenhouse as described above. Water (200 mL) was added daily and shoot formation monitored over a three week period.

### *2.5 Analytical methods*

Field temperatures were determined using a thermocouple probe (Type T, Omega Engineering, Inc., Stamford, CT). Oxygen concentrations were obtained using a model 630 oxygen analyzer and compost oxygen probe (Woods End Research Laboratory, Inc., Mt. Vernon, ME). Biosolids samples were analyzed at the Rutgers Soil Testing Laboratory for standard soil parameters. Moisture contents for other samples were determined using USEPA Method 1684 (USEPA, 2001). To determine fecal coliform counts, the *Standard Methods* (Clesceri et al., 1998) multiple tube fermentation technique employing presumptive and confirmed tests was used, with 5 tubes per dilution. The most probable number (MPN) obtained was compared to USEPA regulatory limits for land application of sewage sludge (USEPA, 1994), which require an MPN <1,000/g total solids (dry weight).

## **3) Results and Discussion**

### *3.1 Preliminary field results*

The preliminary composting test pile (un-amended biosolids, set up in winter) reached a maximum temperature of 14°C. This lack of self-heating after moderate aeration that was provided by building of the pile was expected. The reed bed material had already been stabilized to a considerable extent during anaerobic digestion, followed by storage in the beds for more than 10 years. Anaerobic digestion typically reduces organic matter by 40 to 60% (Tchobanoglous et al., 2003). Analysis of the biosolids (Table 1) showed an organic matter

content of 44%, which is lower than many finished composts, indicating very little readily available carbon remaining. Raw sludge usually has an organic matter content of ~85% (Tchobanoglous et al., 2003). Additionally, the material was acidic (pH 4.6). Optimum pH for composting is more neutral (Krogmann et al., 2011), but pH in the observed range does not prevent self-heating (Strom, 1985). Moisture content and C:N ratio were suitable for composting (Diaz et al., 2002). The C:N for sewage sludge is usually much lower, but uptake of nitrogen by *Phragmites* likely offset the removal of carbon as carbon dioxide (CO<sub>2</sub>). In light of these observations it was decided that addition of a carbon amendment was needed for sufficient self-heating to occur.

### *3.2 Carbon amendment laboratory experiments*

Results of the laboratory carbon amendment tests are shown in Table 2. The effectiveness of a carbon amendment (which may also act as a “bulking” agent to add porosity) that can aid in composting is dependent on factors such as availability of labile carbon, particle size, moisture content, and C:N ratio. Cat food and horse manure were used as positive controls as they have large amounts of easily metabolized organic material and nutrients. Unground oak (*Quercus alba*) leaves were too slow to degrade to make them useful as an amendment, while the undewatered primary and secondary sludges were too dilute (moisture content > 95%) to be effective. Cured compost has little readily available carbon as most of it is degraded during the composting process.

It is unclear why the sawdust trial was unsuccessful. Sawdust has a C:N ratio in the range of 100-500:1, perhaps raising the ratio of the mixture too high and potentially limiting composting (Dickson et al., 1991). Alternatively, the particle size of the substrate may have been

too small, causing clumping or compaction that could impede oxygenation. It is also possible that the particular wood used was slow to degrade.

The wastewater treatment facility had a fats, oils and grease (FOG) control program for food service establishments, and vegetable oil was tested as a surrogate for this available carbon amendment. Vegetable oil amended flasks showed an increase in temperature from 16.5 to 36°C within five days. Lemus et al. (2004) showed that yard trimmings amended with grease trap sludge added at 5% dry solids resulted in enhanced performance in terms of temperature profile and rate and extent of biodegradation of solids and lipids. However, this amendment was not field tested due to a lack of on-site mixing equipment and out of concern for attracting vermin.

GPAGB added at 33% (dry weight basis) to reed bed biosolids helped increase temperature from 19 to 27°C in less than 24 hr. GPAGB was preferred to other amendments because in addition to its high organic matter content (almost 40% C; Longhi et al., 2008), it is available on site and its use would not increase the overall mass of material requiring disposal. GPAGB was field tested in two ratios (1:1 and 1:2 w/w) with respect to biosolids.

### *3.3 Field Trial 1 (1:1 w/w GPAGB:biosolids)*

In the first field trial, the pile interior reached a maximum temperature of 54°C by Day 6. While successful in stimulating self-heating, a 1:1 (w/w) *Phragmites*:biosolids ratio presented a materials handling problem. The bulk density of GPAGB (0.23 g/mL) was much lower than that of the biosolids (0.65 g/mL), so that a ratio of 4:1 (v/v) GPAGB:biosolids was required to achieve the 1:1 (w/w). Therefore, compostability at a reduced ratio of GPAGB:biosolids was tested.

### *3.4. Field Trial 2 (1:2 w/w GPAGB:biosolids )*

Figures 1 and 2 show the change in temperature and oxygen concentrations over the experimental period in field trial 2. Within a week, temperatures  $\geq 55^{\circ}\text{C}$  were observed in the pile interior (Figure 1). The pile was generally hotter at a height of 3 ft above the ground compared to other regions. This could be due to the low heat loss at this height to the outside through conduction and convection. On day 8, the average temperature for all the insertion depths combined at the 3 ft height was  $52.4^{\circ}\text{C}$  and a maximum temperature for the trial of  $58.5^{\circ}\text{C}$ , was observed. Figure 3 shows the temperature profile of the pile at 3 ft height (average value of temperature measurements from all depths combined) during the experimental period.

The pile was turned on day 9. Temperature measurements taken on day 11 showed that pile temperatures remained below  $50^{\circ}\text{C}$  with a maximum temperature of  $45^{\circ}\text{C}$  observed at 5 ft height and 5 ft insertion depth. On day 15, the pile temperatures reached a maximum of  $50.5^{\circ}\text{C}$  at 3 ft height and 3 ft depth. The pile was turned a second time on day 16. After the second turn, measurements taken on day 18 showed that the pile temperatures remained below  $35^{\circ}\text{C}$  across the pile.

In the initial stages of pile set up, the oxygen concentrations were comparable to ambient air concentrations. As biological activity increased over the first few days, as shown by an increase in temperature, the oxygen concentrations decreased. Very low oxygen concentrations ( $<1\%$ ) were observed on day 3 at 3 ft height (Figure 2). These concentrations later increased, but still frequently remained below 10%. Although oxygen concentrations in this range are not ideal for composting, they are not uncommon as observed in the windrow composting of leaves (Strom et al., 1986). Even though the interior of the pile appeared to be anaerobic in some cases, no undesirable odors were observed. Introduction of oxygen from outside occurred during the first and second turns, but Michel et al. (1996) have shown that oxygen introduced by turning a

pile becomes depleted within several hours. Figure 3 shows the oxygen profile at 3 ft height (average oxygen concentrations from all insertion depths combined) during the experimental period.

Based on these results, a 1:2 (w/w) ratio would not allow the tested reed bed material in a pile of this size to self-heat and maintain a 55°C temperature through the five turnings required to demonstrate further pathogen destruction. Additional GPAGB, a larger pile size, or an alternative composting strategy would be needed to achieve that goal.

#### *3.4.1. Fecal coliforms*

Numerous studies have shown that thermophilic composting destroys plant, human and animal pathogens (Burge et al., 1981, Bollen, 1993, Pourcher et al., 2005). Singh et al. (2006) reported that most bacterial pathogens are eliminated at 50°C within 3-15 days, while inactivation of plant fungal pathogens occurs at 55-63°C in 1-21 days; however, drier conditions could allow pathogens to survive longer and at higher temperatures (Bollen, 1985).

The lowest MPN counts of 175 MPN/g dry weight solids were seen in the reed bed biosolids material collected prior to the composting experiment and also on Day 29 at the end of the composting period. On Day 0 the counts were 4000 MPN/g dry weight, exceeding the USEPA regulatory limit (<1000 MPN/g), but by Day 9 the count dropped to 550 MPN/g, which meets the limit. The high counts on Day 16 may represent regrowth, or incorporation of materials from pile edges with high counts, but also could be in part an artifact due to exceeding sample holding times. Overall, the MPN results suggest that under appropriate conditions a composting treatment for this material could result in MPN counts that would meet USEPA criteria.

#### *3.4.2 Rhizome survival*

Important factors that determine plant and their seed mortality during composting are exposure temperature, duration of exposure and moisture content of the compost (Dahlquist et al. 2007). Seeds in a drier environment are able to survive at a higher temperature than in a moist environment.

No re-growth was observed in any of the 72 rhizomes retrieved from the composting pile. All non-composted controls re-sprouted. These results indicate that temperatures achieved in the pile during composting with the 1:2 ratio of GPAGB:reed bed biosolids were sufficient to kill *Phragmites* rhizomes.

#### 3.4.3 Laboratory heat kill rhizome experiments

Ambient temperatures in the reed beds reached at least 33°C during the summer and *Phragmites* survives in Death Valley, CA, where summer temperatures reach 43 – 46°C (USDA, 2015), so it was assumed that *Phragmites* would exhibit heat tolerance. In a laboratory experiment, Dahlquist et al (2007) showed that 90% of the seeds of six species of plants (annual sowthistle, barnyard grass, London rocket, common purslane, black nightshade, tumble pigweed) were killed after exposure to 60°C for less than three hours. In a laboratory study, Weise et al. (1998) showed that in composting manure at 35% moisture placed in an oven, sorghum, barnyard grass, pigweed, *Kochia* (burning bush) and johnsongrass seeds were all killed within 3 days at 49°C. However, 30% of the bindweed seeds tested did survive even 72°C for 30 days, and 20% survived 83°C for 1 day.

Rhizomes survived at temperatures of 40 and 45°C for 24 hr; at 50°C they grew after 12 hr, but 100% mortality was observed after 24 hr. At 55°C, none of the replicates survived. These results indicate that temperatures achieved when composting reed bed solids with above ground

biomass is potentially a treatment to kill live rhizomes, thus increasing land biosolids disposal and reuse options.

In addition to pathogen and vector attraction requirements, monitoring heavy metal concentrations in the reed bed biosolids determines their suitability for land application. Metal uptake by growing *Phragmites* reduces biosolids concentrations, but reincorporation of the plant materials for composting would return those metals to the final product. Organic matter mineralization can increase metals concentrations in the remaining solids while biosorption by the microbial biomass and metal complexation with the humic substances could change bioavailability (Cai et al., 2007). However, metal concentrations in biosolids are highly dependent on the source of wastewater being treated. While no metals analysis of the final compost was conducted, heavy metal analysis of the reed bed biosolids by the treatment plant's external contractor showed that metal concentrations (data not shown) were well below the USEPA ceiling concentration limits for biosolids applied to land and limits for pollutant concentrations in biosolids (USEPA, 1994b), as well as New Jersey Department of Environmental Protection (NJDEP, 1998) soil limits for cumulative metal loading.

In conclusion, in the current study, composting reed bed biosolids with green *Phragmites* above-ground biomass (readily available onsite) achieved temperatures that destroyed live *Phragmites* reproductive rhizomes. In addition, although the specific field trial did not succeed in meeting the time temperature requirements for Class A biosolids, the MPN fecal coliform counts suggest that composting could result in achieving the pathogen mortality requirements for beneficial reuse of reed bed biosolids. Composting fresher reed bed material instead of allowing it to accumulate and stabilize for such an extended period also could contribute to meeting USEPA EQ and Class A status for biosolids disposal/reuse.

#### 4) Acknowledgements

We would like to thank the management of the wastewater treatment facility for funding this project, and its staff for help with the field composting piles. We would also like to thank Mr. Scott Davis of Constructed Wetlands Group for providing *Phragmites* rhizomes for temperature-mortality experiments. The primary author would like to especially thank Dr. Imtiaz Rangwala for all the intellectual discussions and help during this project.

#### 5) Literature Cited

- Begg, J.S., Lavigne, R.L., Veneman, P.L. 2001. Reed beds: constructed wetlands for municipal wastewater treatment plant sludge dewatering. *Water Science and Technology* 44: 393-398.
- Bollen, G.J. 1985. Lethal temperature of soil fungi. *Ecology and Management of Soil-borne Plant Pathogens*. In: Parker, C.A., Rovira, A.D., Moore, K.J., Wong, P.T.W., Kollmorgen, J.F. (eds). *Ecology and management of soil borne plant pathogens*. The American Phytopathological Society. St. Paul, MN, USA 191-193.
- Bollen, G.J. 1993. Factors involved in inactivation of plant pathogens during composting of crop residues. *Science and Engineering of Composting: Design, Environmental, Microbiological and Utilization Aspects*. 301-318.
- Burge, W.D., D. Colacicco, W.N. Cramer. 1981. Criteria for achieving pathogen destruction during composting. *Journal Water Pollution Control Federation* 53:1683-1690.
- Burgoon, P.S., Kirkbride, K.F., Henderson, M., Landon, E. 1997. Reed beds for biosolids drying in the arid northwestern United States. *Water Science Technology*. 35(5), 287-292.
- Cai, Q.Y., Mo, C.H., Wu, Q.T., Zeng, Q.Y., Katsoyiannis, A. 2007. Concentrations and speciation of heavy metals in six different sewage sludge composts. *Journal of Hazardous Materials*. 147:1063-1072.
- Clesceri, L.S., Greenberg, A.E., Eaton, A.D. 1998. *Standard methods for the examination of water and wastewater*, 20<sup>th</sup> ed. American Public Health Association. Washington, D.C.
- Dahlquist, R.M., Prather, T.S., Stapleton, J.J. 2007. Time and temperature requirements for weed seed thermal death. *Weed Science* 55:619-625.
- De Maeseneer, J.L. 1997. Constructed wetlands for sludge dewatering. *Water Science Technology*. 35(5), 279-285.

- Diaz, L.F., Savage, G.M., Golueke, C.G. 2002. Composting of municipal solid wastes. Chapter 12 in Handbook of Solid Waste Management, Tchobanoglous, G., Kreith, F. (Eds.), McGraw-Hill, New York, NY.
- Dickson, N., Richard, T., Kozlowski, R. 1991. Composting to reduce the waste stream: a guide to small scale food and yard waste composting.  
<http://cwmi.css.cornell.edu/compostingtoreduce.pdf>
- Edwards, J.K., Gray, K.R., Cooper, D.J., Biddlestone, A.J., Willoughby, N. 2001. Reed bed dewatering of agricultural sludges and slurries. *Water Science and Technology*. 44(11-12), 551-558.
- Finstein, M.S. 1972. *Pollution Microbiology: a Laboratory Manual*. Marcel Dekker, New York. 168 pp.
- Finstein, M.S., Miller, F.C., Hogan, J.A., Strom, P.F. 1987. Analysis of EPA guidance on composting sludge: Part III - oxygen, moisture, odor, pathogens. *BioCycle* 28(3):38-44.
- Gersberg, R.M., Elkins, B.V., Lyons, S.R., Goldman, C.R. 1985. Role of aquatic plants in wastewater treatment by artificial wetlands. *Water Research* 20:363-367.
- Giraldi, D., Masciandaro, G., Peruzzi, E., Bianchi, V., Peruzzi, P., Ceccanti, B., Lanelli, R. 2009. Hydraulic and biochemical analysis on full-scale sludge consolidation reed beds in Tuscany (Italy). *Water Science and Technology*. 60(5), 1209-1216.
- Kim, B.J., Smith, E.D. 1997. Evaluation of sludge dewatering reed beds; a niche for small systems. *Water Science Technology*. 35(6), 21-28.
- Krogmann, U., Körner, I, Diaz, L.F. 2011 Composting technology. pp. 533-568 in *Solid Waste Technology & Management*, Christensen, T.H., (Ed.), John Wiley & Sons, Ltd., Chichester, U.K.
- Kuusemets, V., Lohmus, K. 2005. Nitrogen and phosphorus accumulation and biomass production by *Scirpus sylvaticus* and *Phragmites australis* in a horizontal subsurface flow constructed wetland. *Journal of Environmental Science and Health* 40:1167-1175.
- Lemus, G.R., Lau, A.K., Branion, R.M.R., Lo, K.V. 2004. Bench scale study of the biodegradation of grease trap sludge with yard trimmings or synthetic food waste via composting. *Journal of Environmental Engineering and Science* 3:485-494.
- Longhi, D., Bartoli, M, Viaroli, P. 2008. Decomposition of four macrophytes in wetland sediments: Organic matter and nutrient decay and associated benthic processes. *Aquatic Botany* 89: 303–310.
- Meynell, G.G. and Meynell, E. 1970. *Theory and practice in experimental bacteriology*, 2<sup>nd</sup> ed. Cambridge University Press, Great Britain. 347 pp.

- Michel, F.C., Jr., Forney, L.J., Huang, A.J., Drew, S., Czuprenski, M., Lindeberg, J.D., Reddy, C.A. 1996. Effects of turning frequency, leaves to grass mix ratio and windrow vs. pile configuration on the composting of yard trimmings. *Compost Science & Utilization* 4: 26-43.
- New Jersey Department of Environmental Protection (NJDEP).1998. Technical manual for residuals management. Appendix A- Residual quality limits.  
<http://www.state.nj.us/dep/dwq/techmans/residtm.pdf>
- Nielsen, S. 2008. Sludge treatment and drying reed bed systems 20 years of experience. In: Proceedings of European conference on sludge management, Leige, Belgium.
- Pourcher, A.M., Morand, P., Picard-Bonnaud, F., Billaudel, S., Monpoeho, S., Federighi, M., Ferré, V., Moguedet, G. 2005. Decrease of enteric micro-organisms from rural sewage sludge during their composting in straw mixture. *Journal of Applied Microbiology* 99:528-39.
- Ravit, B., Ehrenfeld, J.G., Häggblom, M.M., Bartels, M. 2007. The effects of drainage and nitrogen enrichment on *Phragmites australis*, *Spartina alterniflora*, and their root-associated microbial communities. *Wetlands* 27(4):915-927.
- Singh, A., Billingsley, K., Ward, O. 2006. Composting: A potentially safe process for disposal of genetically modified organisms. *Critical reviews in Biotechnology*. 26;1-16.
- Strom, P.F. 1985. Effect of temperature on bacterial species diversity in thermophilic solid-waste composting. *Applied and Environmental Microbiology* 50:899-905.
- Strom, P.F., Flower, F.B., Liu, M.H.P., Finstein, M.S. 1986. Municipal Leaf Composting: Recommended Methods. *BioCycle* 27(9):48-52.
- Tata, P., Lue-Hing, C., Bertucci, J.J., Sedita, S.J., Knafl, G.J. 2000. Class A biosolids production by a low-cost conventional technology. *Water Environment Research* 72 413-422.
- Tchobanoglous, G., Burton, F.L., Stensel, H.D. 2003. Metcalf & Eddy, Inc.'s Wastewater engineering: Treatment, disposal, and reuse. 4<sup>th</sup> edition. McGraw-Hill. New Delhi.
- Toet, S., Bouwman, M., Cevaal, A., Verhoeven, J.T.A. 2005. Nutrient removal through autumn harvest of *Phragmites australis* and *Typha latifolia* shoots in relation to nutrient loading in a treatment wetland system used for polishing sewage treatment plant effluent. *Journal of Environmental Science and Health* 40:1133-1156.
- Troesch, S., Linenard, A., Molle, P., Merlin, G., Esser, D. 2008. Sludge drying reed beds: a full and pilot scale study for activated sludge treatment. In Billore, S., Dass, P., Vymazal, J. (Eds), Proceedings of the 11<sup>th</sup> international conference on wetland systems for water pollution control, Indore, India.
- Uggetti, E., Ferrer, I., Llorens, E., Garcia, J. 2010. Sludge treatment wetlands: a review on the state of the art. *Bioresource Technology*. 101, 2905-2912.

United States Environmental Protection Agency (USEPA). 1994a. Land application of sewage sludge. Office of enforcement and compliance assurance. Washington, D.C.  
<http://www3.epa.gov/npdes/pubs/sludge.pdf> (accessed on 11/9/2011)

United States Environmental Protection Agency (USEPA). 1994b. Office of wastewater management. A plain English guide to the EPA part 503 biosolids rule. EPA/832/R-93/003.

United States Environmental Protection Agency (USEPA). 2001. Office of water. Total, fixed, and volatile solids in water, solids, and biosolids. Method 1684. EPA-821-R-01-015.

United States Environmental Protection Agency (USEPA). 2013. Sample Preparation for Fecal Coliform Tests and Salmonella sp. Analysis. Appendix F.  
<http://www.epa.gov/nrmrl/pubs/625r92013/625R92013appF.pdf> (accessed on 3/3/2011)

United States Department of Agriculture (USDA). 2015. Natural resources conservation service. Plant profile for *Phragmites australis* (Cav.) Trin. Ex Steud. (Common reed). Noxious weed information.  
<http://plants.usda.gov/core/profile?symbol=phau7> (accessed on 9/1/15)

Wiese, A.F., Sweeten, J.M., Bean, B.W., Salisbury, C.D., Chenault, E.W. 1998. High temperature composting of cattle feedlot manure kills weed seeds. *Applied Engineering in Agriculture*. 14:377-380.

Yubo, C., Tieheng, S., Tingliang, J., Liping, Z. 2008. Performance of wastewater sludge ecological stabilization. *Journal of Environmental Sciences*. 20, 385-389.

Table 1. Reed bed biosolids laboratory analysis results\*

Parameter	Units	Value
pH		4.6
Electrical Conductivity	mmho/cm	1.21
Organic Matter	%	43.7
Organic Carbon	%	25.4
TKN	%	0.8
Ammonium-N	mg/kg	80
Nitrate-N	mg/kg	170
Moisture Content	%	60
C:N		25
P	mg/kg	360
K	mg/kg	46
Mg	mg/kg	130
Ca	mg/kg	3550
Cu	mg/kg	32
Mn	mg/kg	58
Zn	mg/kg	230
B	mg/kg	5.4
Fe	mg/kg	330

\* Bulk density = 0.65 g/mL; TKN: total Kjeldahl nitrogen (ammonia-N + organic-N); C:N: carbon to nitrogen ratio

Table 2. Amendments tested in laboratory to induce self-heating of reed bed biosolids

Amendment	Amend (%)	Time days	Temp.change(C)		Increase	Comments
			From	To		
Dry cat food*	50 (v/v)	4	19	50	Yes	positive control
Dry cat food	50 (v/v)	4	18	56.5	Yes	positive control
Horse manure <sup>#</sup>	100	6	21	35	Yes	positive control
Oak leaves	67 (v/v)	5	18.5	18.5	No	resistant to degradation
Primary sludge	10 (v/v)	5	16	17	No	low (<5%) total solids
Digested sludge	10 (v/v)	5	16	17	No	low (<5%) total solids
Saw dust	67 (v/v)	4	19	17.5	No	resistant to degradation
Vegetable oil	71 (dwb)	5	16.5	36	Yes	surrogate for food grease
CC	50 (dwb)	3	18	18.5	No	already stabilized
GPAGB	63(v/v)**	4	19	20.5	No	retest with higher ratio
GPAGB	50 (dwb)	< 1	19	35	Yes	chosen for field test
GPAGB	33(dwb)	< 1	19	27	Yes	chosen for field test

Unless noted, moisture content adjusted to 60% and pH to 7. GPAGB = green *Phragmites* above-ground biomass; Amend (%) = % amendment used in relation to total of biosolids plus amendment; dwb = dry weight basis; CC = cured compost; \*moisture content unadjusted, 9%; # moisture content unadjusted, 50%; \*\* ~16% dwb.

Table 3. Fecal coliform test results.

Day	Sample location*	MPN <sup>#</sup> /dry wt.
	Undisturbed reed beds	175
0	Composting pile composite	4000
9	3 ft (0.9 m) height	550
16	3 ft (0.9 m) height	> 225000**
16	1 ft (0.3 m) height	> 225000**
23	3 ft (0.9 m) height	175

\* Composites of several samples collected at each location.

# Most probable number; the 95% confidence interval of each test can be determined by dividing and multiplying the MPN by a factor for 3.30 based on a 5 tube per 10-fold dilution method (Meynell and Meynell, 1970).

\*\* Required holding time of 6 hr exceeded.

Figure 1. Temperature measurements in the composting pile. (1 ft  $\approx$  0.3 m)

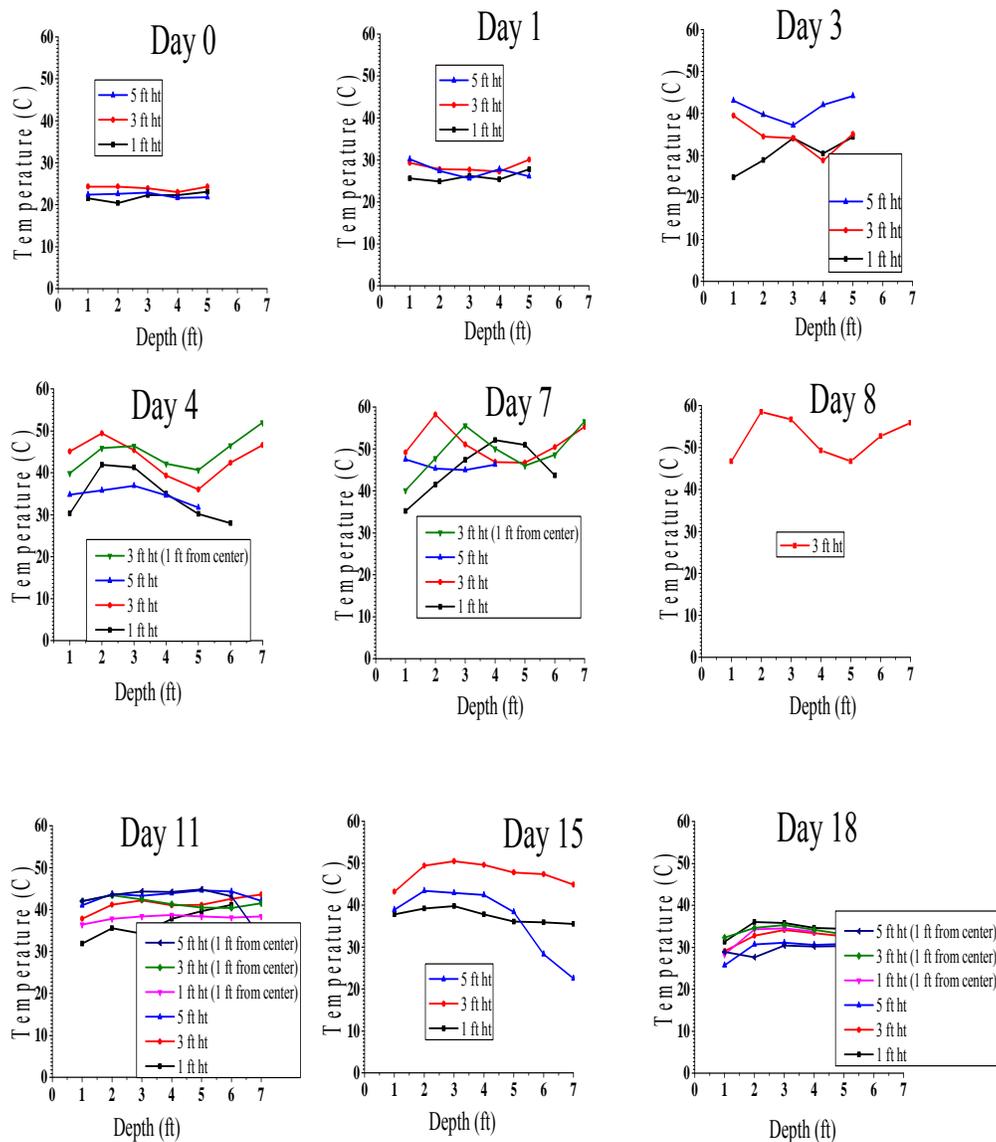


Figure 2. Oxygen measurements in the composting pile


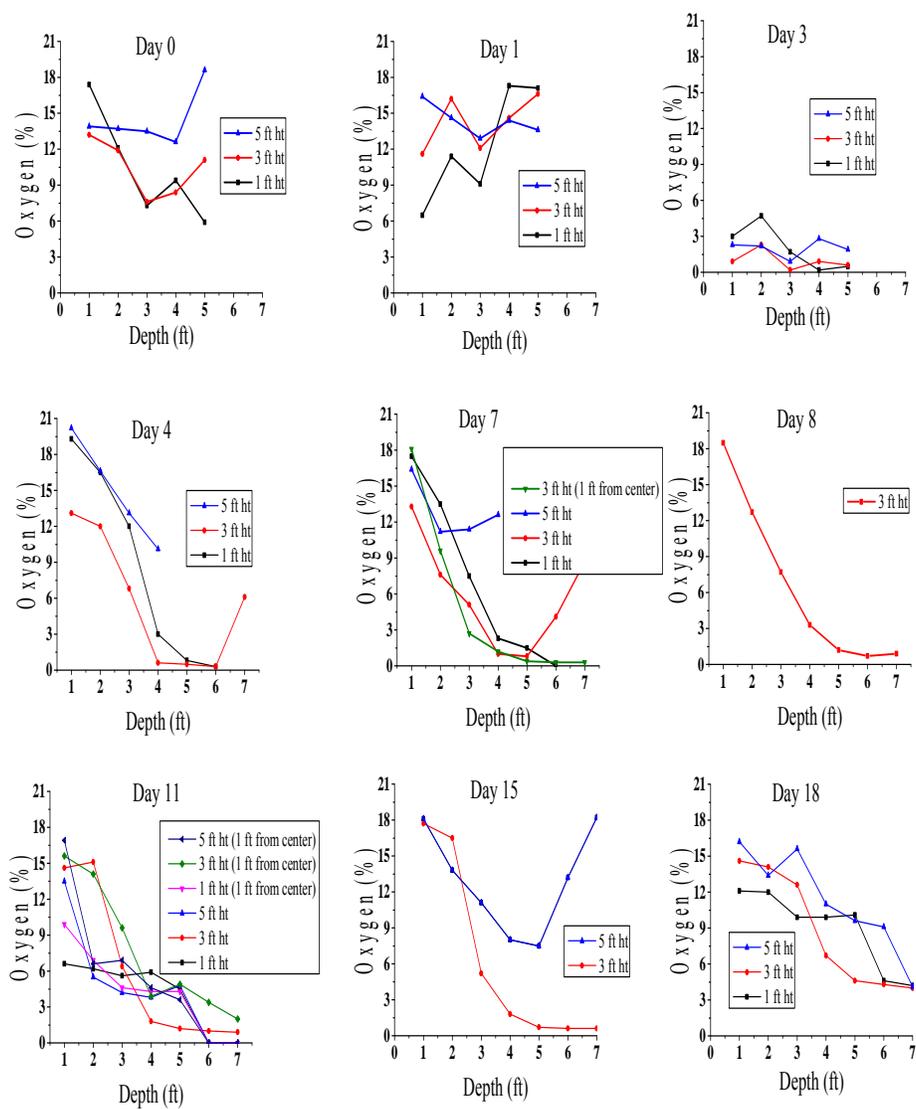


Figure 3. Temperature and oxygen profile at 3 ft height during the experimental period

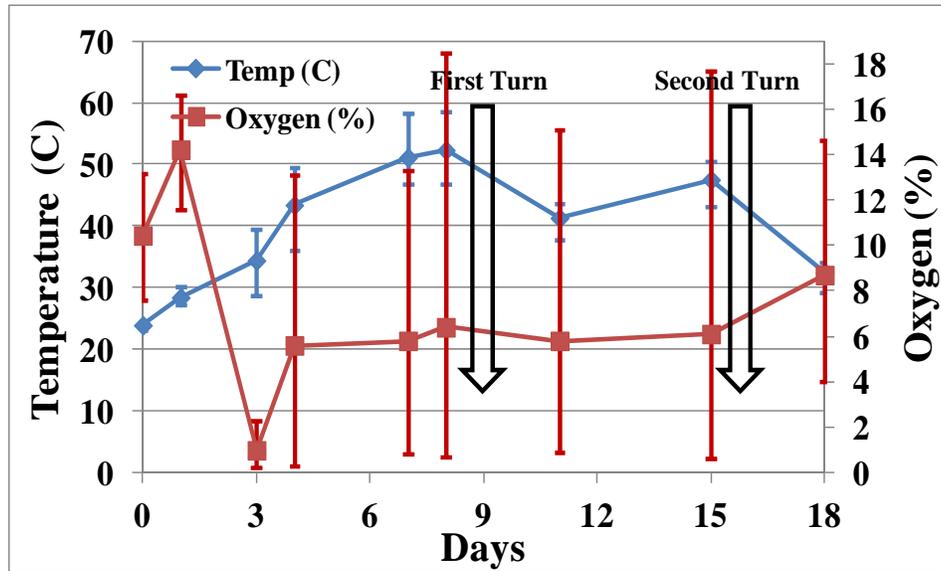

Each data point is the average from 7 insertion depths (1, 2, 3, 4, 5, 6, and 7 ft); error bars represent the range.